

525,574
10/525574

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021390 A1

(51) International Patent Classification⁷: **H01J 29/48**,
3/02, 31/12

(21) International Application Number:
PCT/IB2003/003296

(22) International Filing Date: 21 July 2003 (21.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02078534.1 28 August 2002 (28.08.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN GORKOM, Ramon, P.** [NL/NL]; Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN DER VAART, Nijs, C.** [NL/NL]; Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL). **ROSINK, Johannes, J., W., M.** [NL/NL]; Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: **VACUUM DISPLAY DEVICE WITH REDUCED ION DAMAGE**

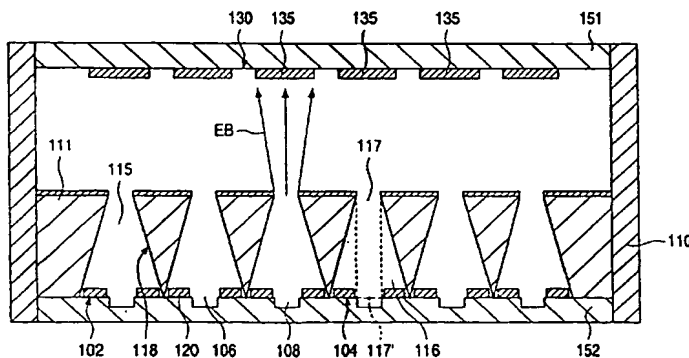

A



B

(57) Abstract: A display device has a display screen for displaying image information, and cathode means comprising an emitter material for emitting electrons. The emitted electrons are collected by an electron concentrator which redistributes the electrons in a homogenous electron beam (EB). The emitter material is arranged on a first surface excluding a first impact area on which positive ions land that pass through the electron concentrator. Therefore, substantially no emitter material is provided at the first impact area, so that damage inflicted on the cathode means by the positive ions is reduced. Preferably, the display device has a pumping chamber between the cathode means and a back plate, for removing residual gases from the display device.

WO 2004/021390 A1